

ELTHERM TT6

FIRST ROOM THERMOSTATS

with LCD display that provides time-programmed control of room temperatures

FIRST®

2-POINT CONTROL 1 / 0



FIRŠT ELTHERM TT6, are room thermostats designed for radiator, convector or fan heating in domestic or light commercial premises.

- Simple use and easy installation
- Digital display (time, day, temperature, status of program)
- Heating-off function in case of empty batteries
- Manual settings for constant heating temperature

OPERATION

Eltherm TT6 room thermostat is designed for radiator, convector or fan heating in domestic or light commercial premises. It may also be used for zone temperature controlling in large buildings. Temperature control is based on the measurement of room temperature.

Eltherm TT6 room thermostat with digital display provides time-programmed control of room temperatures.

MAINTENANCE

Room thermostat ELTHERM TT6 requires battery change on every 2 years.


TECHNICAL DATA: ROOM THERMOSTAT

Battery power supply: 2x AA (LR6 - alkaline)
 Output: Potential-free relay SPDT
 Output relay rating: 16(10)A, 250VAC, 50Hz
 Room temperature setting range: 5 - 35°C
 Hysteresis of thermostat: +/-0,5K
 Dimensions: 138x86x24mm
 Weight: 0,82kg
 Three modes of operation: Lower/night - eco. temp.
 - Higher/day - comfort temp.
 - Weekly program timer for each day (hourly setting)

COMPATIBILITY

Room thermostat ELTHERM TT6 is compatible with actuators series EMV 110, S9000, UNI 3P, UNI D2P, ROTODIVERT and MV 120 actuators.


CODE AND ELECTRICAL CONNECTION

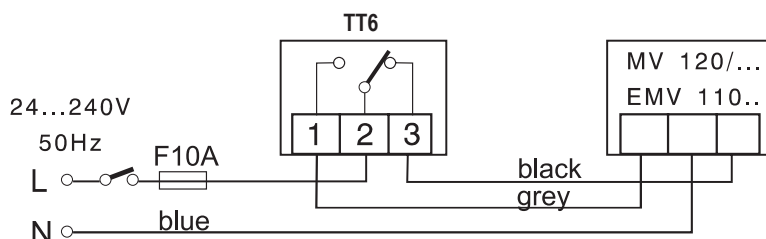

ELTHERM TT6, room thermostat

Code	Type	Description
20066	ELTHERM TT6	digital thermostat with a weekly timer

INSTALLATION EXAMPLES

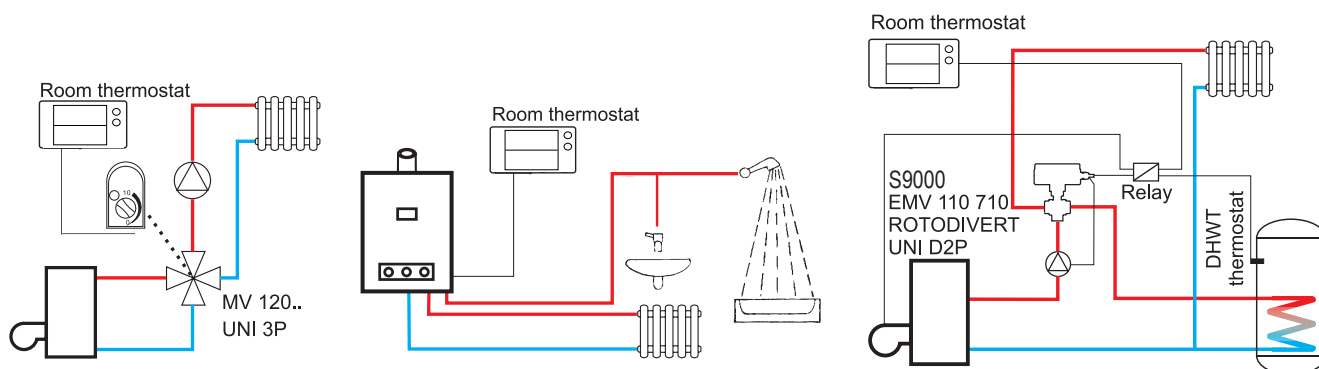

ELTHERM TT6 / FIRST d.o.o. / Copyright 2016

FIRST®

FIRŠT d.o.o.
 Koroška cesta 56
 SI-3320 Velenje
 SLOVENIA

phone: +386 3 898 35 00
 fax: +386 3 898 35 35
 email: info@first.si
 web: www.first.si

www.first.si
 Let First be your first choice.

